





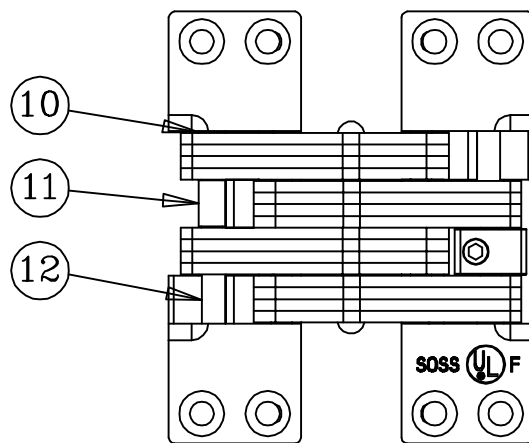


HINGE OPEN 180°

NO.	QTY.	PART NAME	MATERIAL
1	2	HINGE BODY	316 STAINLESS STEEL
2	1	BACK PLATE	STEEL
3	1	SLIDE	STEEL
4	2	FLAT HEAD SCREW	STEEL
5	1	SPRING	STEEL
6	1	CAP SCREW	STEEL
7	1	RETAINER	STEEL
8	1	GUIDE TUBE	STEEL
9	16	LINK	316 STAINLESS STEEL
10	2	SHORT ROLLER	STAINLESS STEEL
11	1	LONG ROLLER	STAINLESS STEEL
12	2	SPACER	STAINLESS STEEL
13	1	RIVET PIN	STAINLESS STEEL
14	2	LONG PIN	STAINLESS STEEL
15	1	CHANNEL PIN	STAINLESS STEEL

SUPPLIED:
MACHINE SCREW
#12-24 X 1"

DO NOT SCALE DRAWING
ALL DIMENSIONS ARE IN INCH
MIN. MATERIAL THICKNESS IS 2"
UL FIRE RATING FOR FIRE RATED DOORS ONLY!
FOR BODY DIMENSIONS SEE #420 HINGE TEMPLATE DRAWING

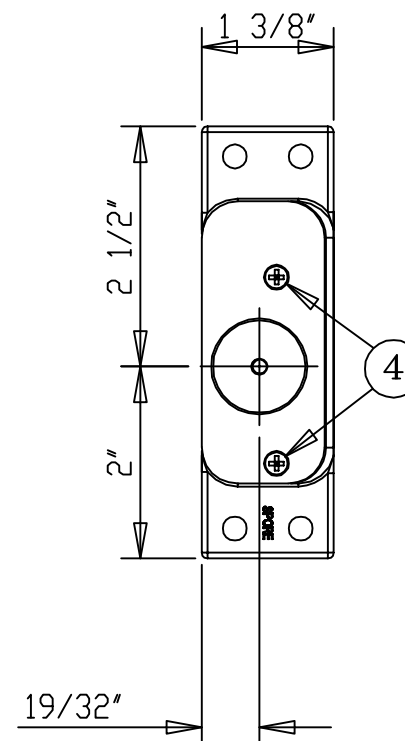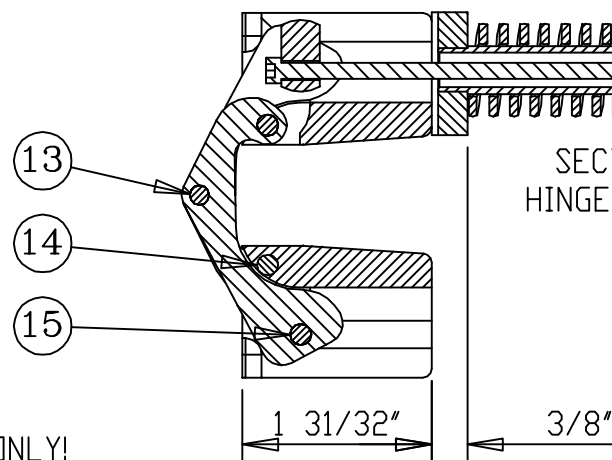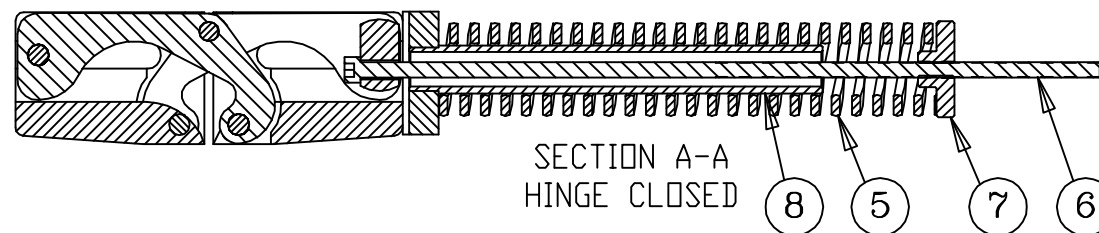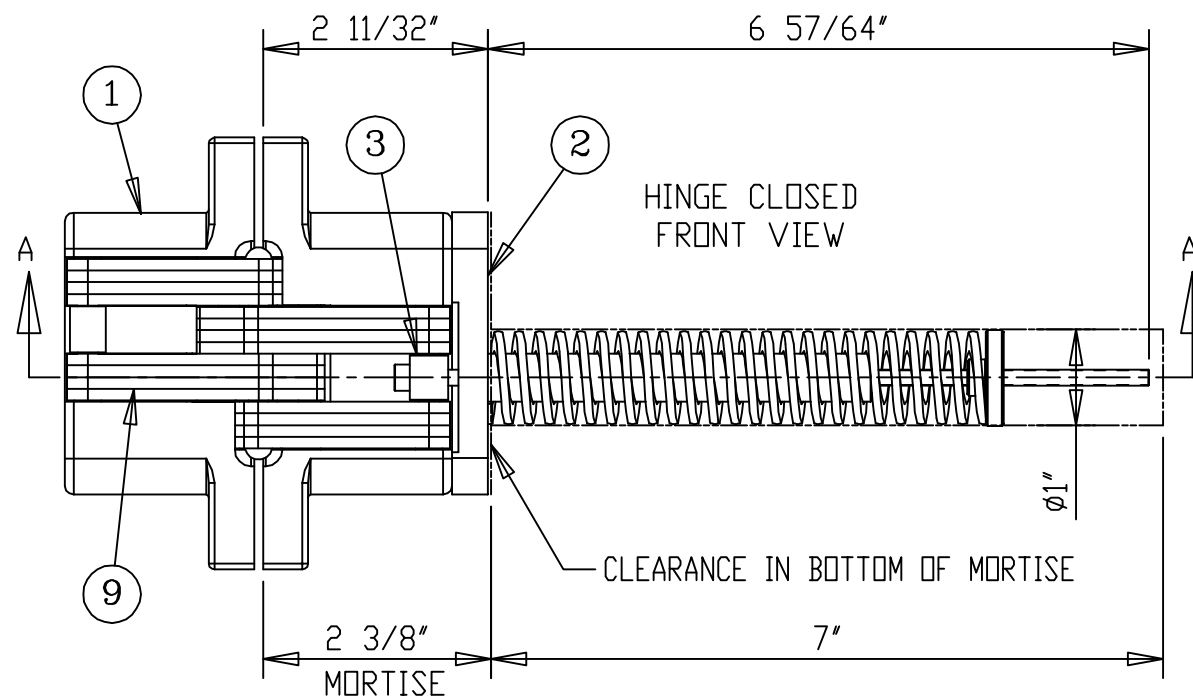

B	5/7/15	ADDED GUIDE TUBE	LHH
A	5/12/13	REDRAWN	SRD
REV	DATE	DESCRIPTION	BY
UIP © Copyright Universal Industrial Products, Inc. One Coreway Drive Pioneer, Ohio 43554-0628			SCALE: 1/2" = 1"
SELF-CLOSING HINGE TEMPLATE			DRAWN BY: LHH
#420SSIC SELF-CLOSING SSOS INVISIBLE HINGE			DATE: 5/07/15
			DRAWING # 420 SSIC